
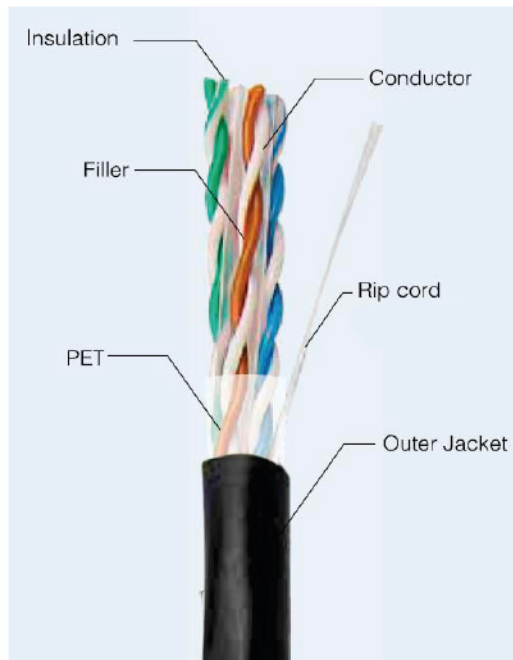


Description

- ✖ Rated temperature: 75℃
- ✖ Reference standard: UL444, ANSI/TIA-568-C.2
ISO/IEC 11801, IEC 61156-5
- ✖ Product standard certification:
- ✖ Flame test: N/A
- ✖ Oxygen free copper conductor
- ✖ Colour-coded PE insulation
- ✖ PE(UV resistant) jacket
- ✖ Packaging: Per customer request

Product figure

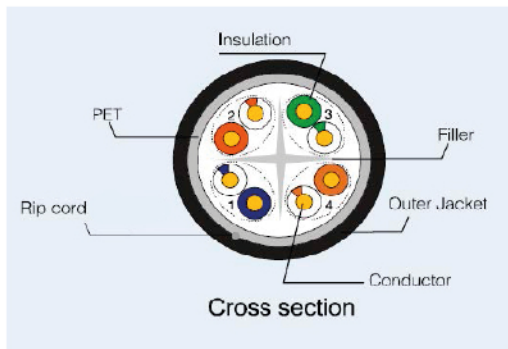

Application

- ❑ 100Base-T4
- ❑ 100Base-TX
- ❑ 100VG-AnyLAN
- ❑ 1000Base-T
- ❑ 1000Base-TX
- ❑ 155Mbps ATM
- ❑ 622Mbps ATM

Physical characteristics

[illegible]